


USE 90° BEND SUPPORTS 6081301 AT TUBING BENDS TO AVOID HAVING TO CUT AND SPLICE TUBING INSIDE COACH BODY. OUTSIDE OF COACH, COPPER ELBOWS 2252211 AND CRIMP SLEEVES 3779592 MAY BE USED WHERE SPACE IS LIMITED.

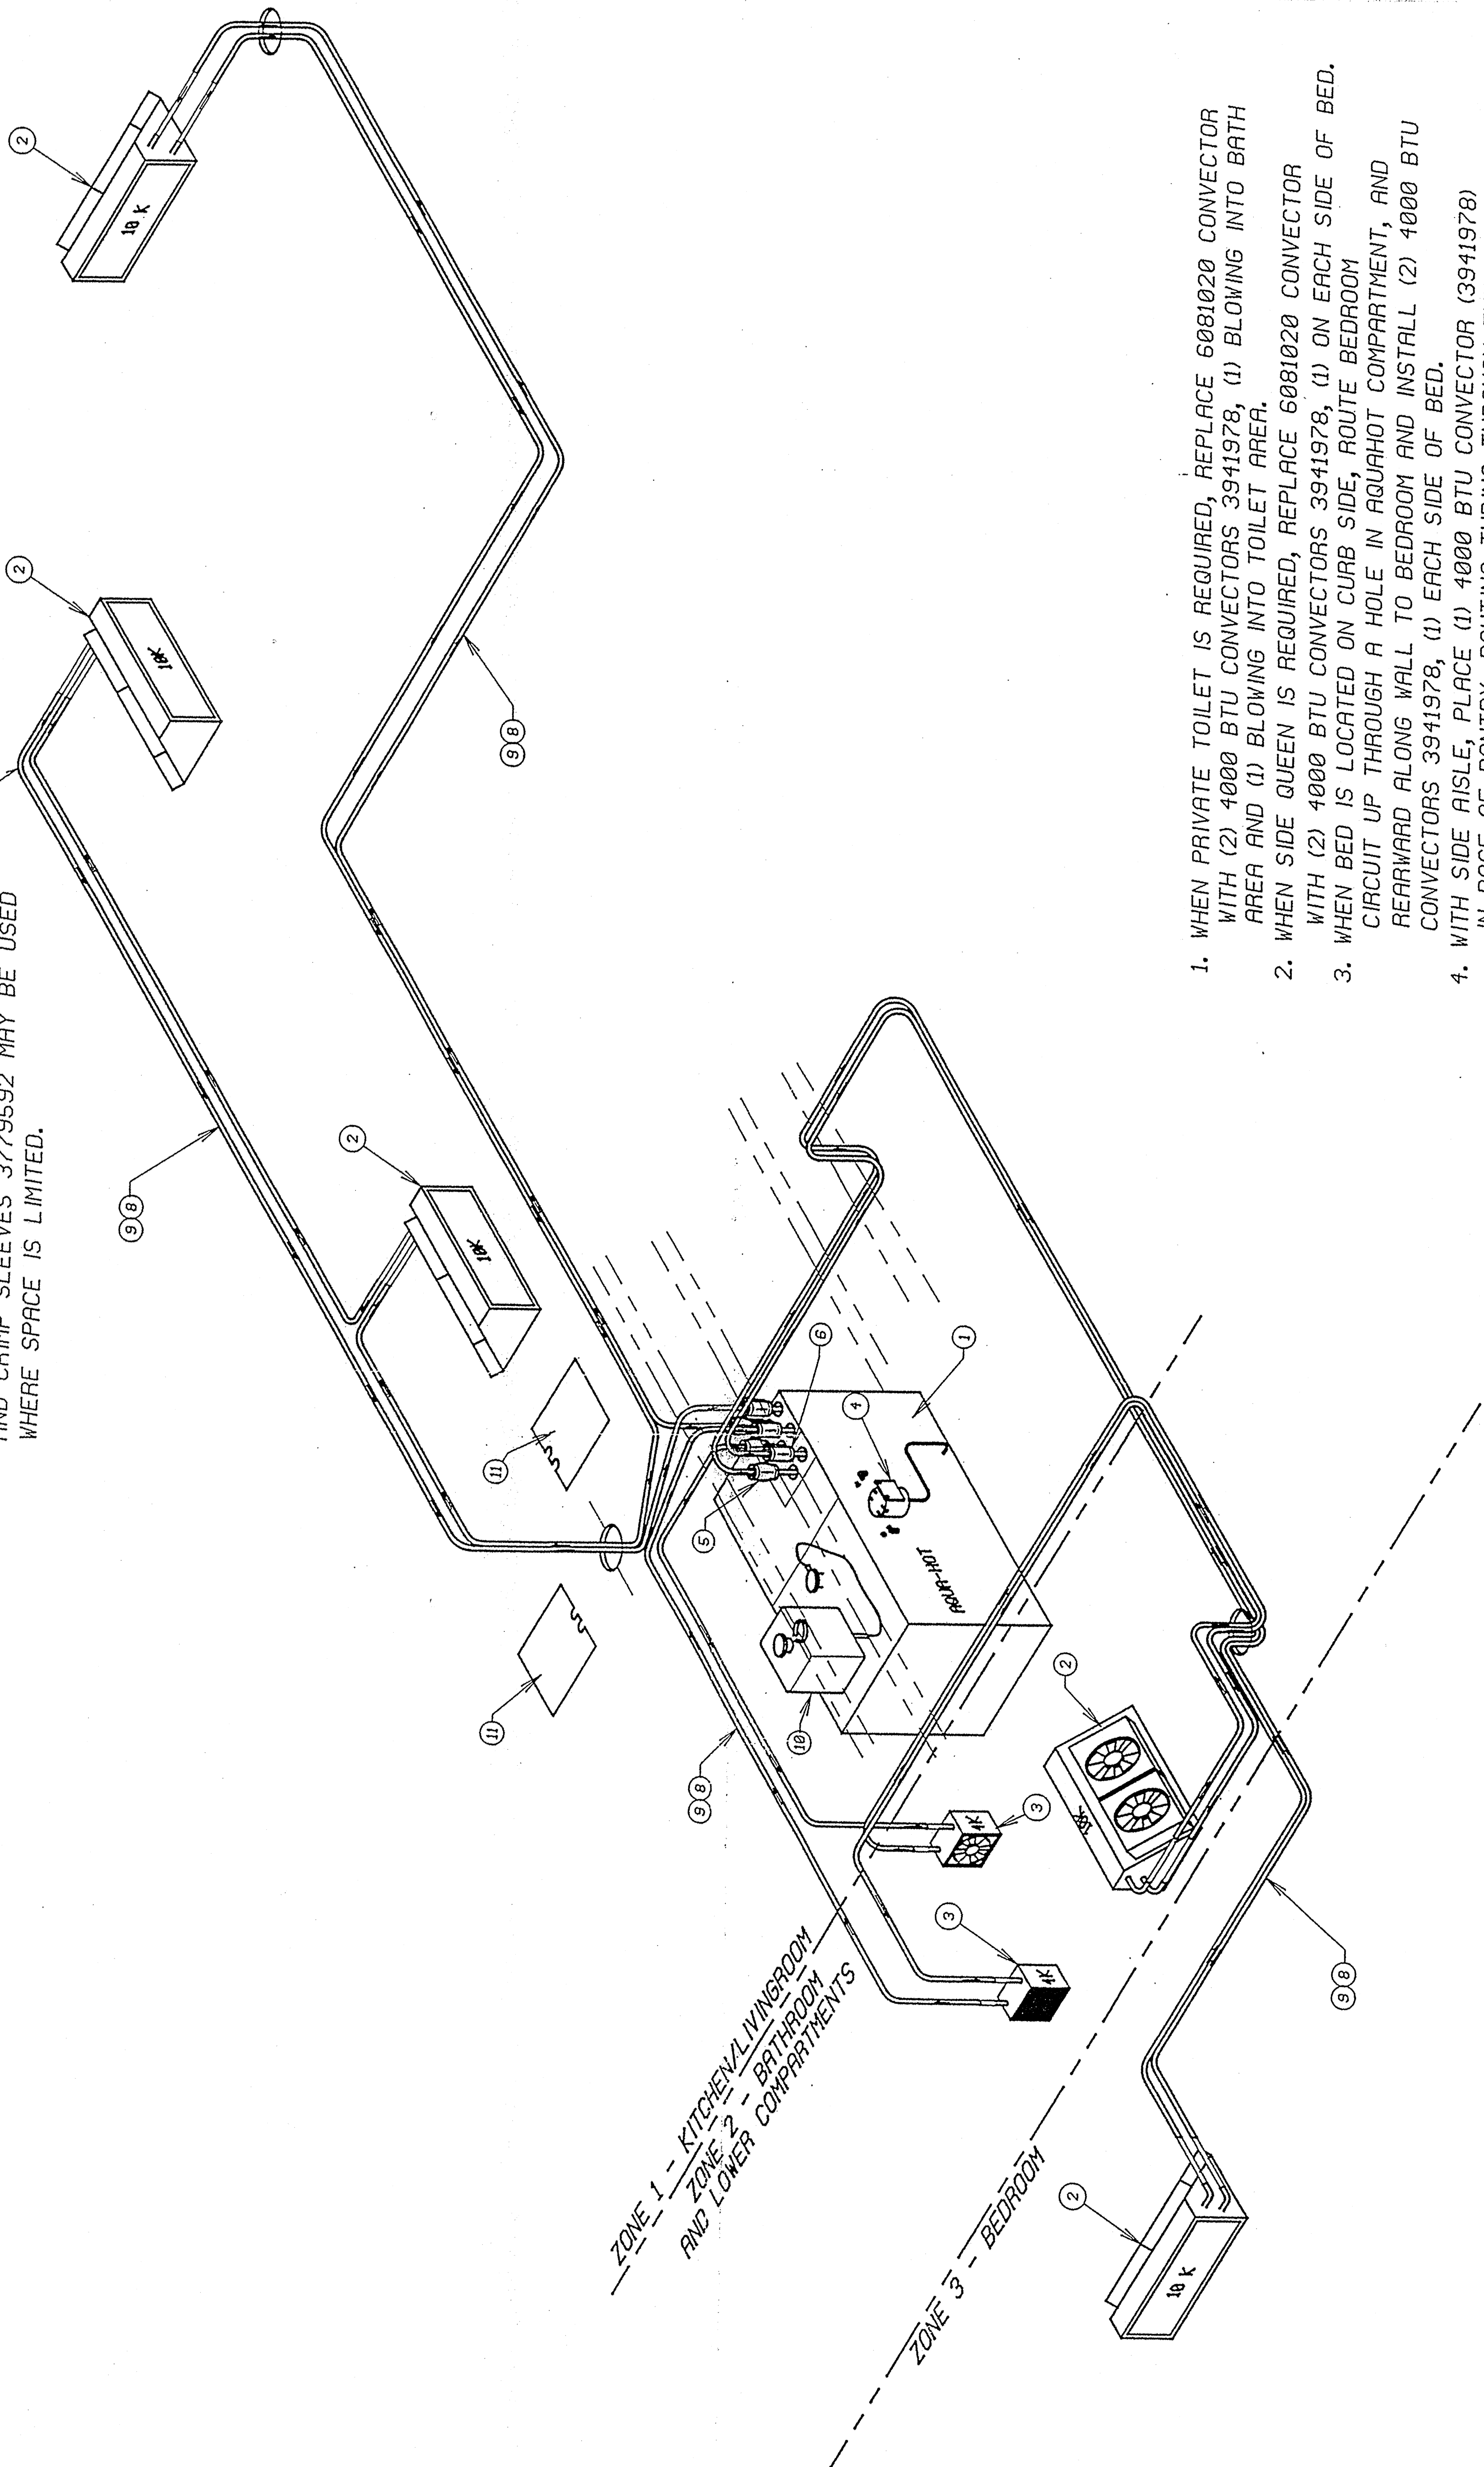

ITEM	P/N	DESCRIPTION	QUANTITY
1	6080949	AQUA-HOT, 4000 BTU, 3 ZONE, 12V, 920-431	1 (SEE NOTE 1)
2	3941978	CONVECTOR, 12V, 4000 BTU, 920-431	5 (SEE NOTE 2)
3	6081012	FILTER ASSY, AQUA-HOT, WITH 1/4" NPT PORTS	3 (SEE NOTE 3)
4	6081302	VALVE, CHECK, AQUA-HOT, 2413900000P	2 (SEE NOTE 4)
5	6081303	HOSE, HEATER, WATER, 5/8" ID, 1/2" NPT X 1/2" FPT	200FT
6	6081304	TUBING, 1/2" ID, W/SSO HEPEX, 180F X 100PSI	200FT
7	6081305	90° ELBOW, 1/2" ID, W/SSO HEPEX, 180F X 100PSI	200FT
8	6081306	CRIMP SLEEVE, 1/2" ID, W/SSO HEPEX, 180F X 100PSI	200FT
9	6081307	COVER, ACCESS HOLE, PLUMBING, HYDRAONIC HEAT	2
10	6081308	ITEMS NOT SHOWN ON DRAWING	
11	6081309	ITEMS NOT SHOWN ON DRAWING	
12	6557710	CLAMP, CLOSED TYPE, INSL, 13/16, 1615	48 (484)
13	6081310	COVERING, FIB, SMOOTH, BLK, 1/8 X 38-3/16 X 3010	2
14	6081311	INSERT, BARBED, 5/8" ID HOSE X 1/2" PIPE	2
15	1142801	ELBOW, BARBED INSERT, 1/4" HOSE X 1/4" NPT	1
16	1408065	ADAPTER, BARBED, 1/2" HOSE X 1/4" NPT	1
17	1563195	CLIP, WIRE AND TUBE CLAMP, 3/8" HOSE, 1/4" FLANGE	2
18	1569308	ANTI-FREEZE, LOW SILICATE-ETH, 8L, BASE W/DCRA	6
19	1722297	BOX, REFLECTIVE, 1/2" DIA, 1/2" X 1/2" X 3/4"	16
20	2211118	ELBOW, COPPER, 1/2" BARB X 1/2" BARB	2
21	2252211	COUPLING, 1/2" PIPE, BRASS	32
22	3779592	DEFLECTOR HEATER, COPPER, 1/2" BARB	1
23	6074162	PIPE, 1-1/4" BIP, THREAD ONE-END	1
24	6081312	CONNECTOR, LOW TEMP, 48-80 DEGREES	1
25	6081313	CLAMP, CONSTANT TENSION, FOR 1/2" POLY TUBING	6
26	6081314	SUPPORT, 80 BEND, 5/8" OD POLY TUBE, WFS11050	30
27	6081315	ELBOW, 1-1/4" PIPE, 90 DEG, GALVANIZED	8
28	6081453	CLAMP, RUBBER, 5/8" ID, 38 DEG	1
29	6081454	ELBOW, RUBBER, 1-1/2" U-GOLT	1
30	6081455	GRILL, CONNECTOR, 4000 BTU	1
31	6081456	CLAMP, MUFFLER, 1-5/8" OD PIPE	1
32	6081457	NIPPLE, PIPE, 1-1/2" DIA, 1/2" X 1/2"	1
33	6081458	ADAPTER, BARBED INSERT, 3/8" FPT X 3/8" BARB	1
34	6081459	GRILL, CONNECTOR, 4000 BTU, FRN COVER	1
35	6081460	ITEMS NOT SHOWN ON DRAWING	2

NOTES: 1. NUMBER OF HEAT EXCHANGERS MAY VARY ACCORDING TO FLOOR PLAN.  
 2. THESE PARTS SUPPLIED WILL ALWAYS BE REQUIRED FOR BAY HEAT.  
 3. THIS HEATER HOSE IS USED TO ADAPT FROM THE 1/2" INCH TUBING TO THE COPPER INLET/OUTLET TUBES ON THE HEAT EXCHANGERS.  
 4.

1. WHEN PRIVATE TOILET IS REQUIRED, REPLACE 6081020 CONVECTOR WITH (2) 4000 BTU CONVECTORS 3941978, (1) BLOWING INTO BATH AREA AND (1) BLOWING INTO TOILET AREA.
2. WHEN SIDE QUEEN IS REQUIRED, REPLACE 6081020 CONVECTOR WITH (2) 4000 BTU CONVECTORS 3941978, (1) ON EACH SIDE OF BED. CIRCUIT UP THROUGH A HOLE IN AQUAHOT COMPARTMENT, AND REARWARD ALONG WALL TO BEDROOM AND INSTALL (2) 4000 BTU CONVECTORS 3941978, (1) EACH SIDE OF BED.
3. WITH SIDE AISLE, PLACE (1) 4000 BTU CONVECTOR (3941978) IN BASE OF PANTRY, ROUTING TUBING THROUGH THE FLOOR AND BEHIND THE WALL ABOVE THE AQUAHOT BAY. LOCATE ADDITIONAL 4000 BTU CONVECTOR IN BATHROOM, USING STANDARD ROUTING ACROSS FRAME AND DOWN STREET SIDE WALL.

MATERIAL:

FLAT SIZE:

FINISH: COLOR OR TYPE  PAINT  PRIME  OTHER

REVISIONS: A MOVED AQUA-HOT TO ROADSIDE

LET: JC

ECN: 9557

DR. APP. CK. DR. DATE: 3/15/95

SCALE: N/A

DIAGRAM, INSTALLATION, AQUAHOT

HEATING

WLWB

DR. JUL.28'94 BY JMHetcoif SIZE C

APP. BY

CK. BY

6080956